




1N4001~1N4007

Silicon Rectifiers

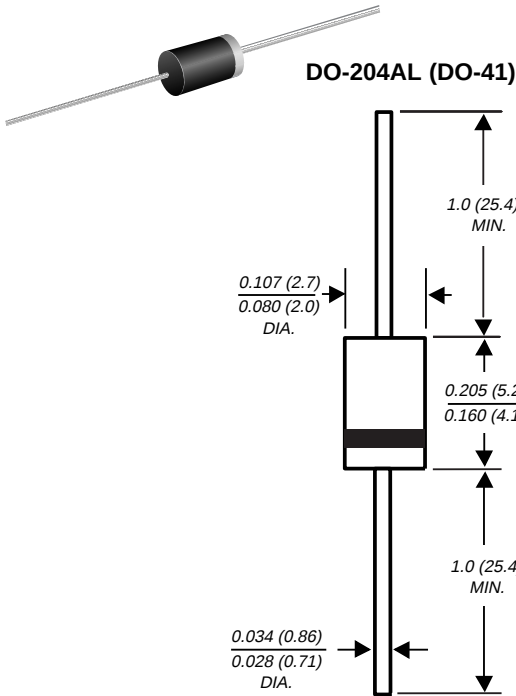

NOTE: Lead diameter is $\frac{0.026 (0.66)}{0.023 (0.58)}$ for suffix "E" part numbers

Dimensions in inches and (millimeters)

General Purpose Plastic Rectifier

Reverse Voltage 50 to 1000 V
Forward Current 1.0 A

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AL, molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.012 ounce, 0.3 gram

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N 4001	1N 4002	1N 4003	1N 4004	1N 4005	1N 4006	1N 4007	UNITS
*Maximum repetitive peak reverse voltage	V _{pRV}	50	100	200	400	600	800	1000	V
*Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =75°C	I _{F(AV)}				1.0				A
*Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) T _A =75°C	I _{FSM}				50				A

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N 4001	1N 4002	1N 4003	1N 4004	1N 4005	1N 4006	1N 4007	UNITS
*Maximum instantaneous forward voltage at 1.0A	V _F				1.0				V
*Maximum DC reverse current T _A = 25°C	I _R				5.0				μA



“电子爱好者”网站是一个面向广大电子爱好者、大专院校学生、中小型企业工程技术人员的电子技术应用、推广专业网站。主要内容有：电子技术应用交流，器件资料、电子设计软件下载，电子技术支持服务，电子产品发布、转让和引进等信息。

本资料由“电子爱好者”网站收集整理，版权属原作者

在使用本资料或软件时，有什么问题，欢迎到“电子爱好者”网站内的 BBS “技术论坛”中发表，我站的热心网友会帮助你的。

技术论坛：<http://www.etuni.com/bbs>

需要更多的电子技术相关资料或软件，欢迎到“电子爱好者”网站下载。

“电子爱好者”网站：<http://www.etuni.com>